


Capacidad 22 Tm (-SK) H = 1450 mm Ch = 1050 mm

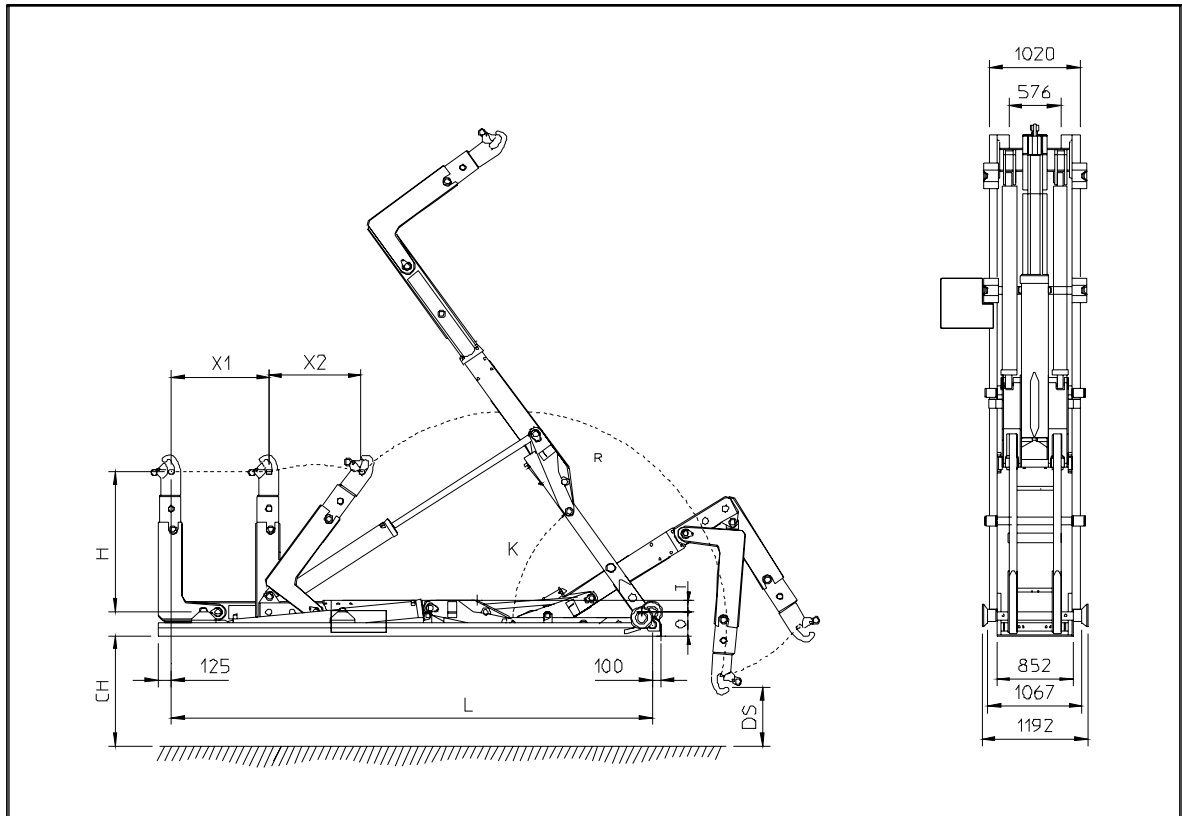

MODELO	X (mm)	L (mm)	O (mm)	K	R (mm)	T (mm)	PESO (kg)	MS (mm)	LONGITUD MIN./MAX DEL CONTENEDOR (mm)
22-49-SK	800 + 1050	4900	280	57°	2310	130	2600	665	3050-6000
22-53-SK	1000 + 1050	5350	280	53°	2345	130	2675	667	3300-6450
22-55-SK	1000 + 1050	5550	280	54°	2495	130	2725	790	3300-6650
22-57-SK	1200 + 1050	5700	280	54°	2455	130	2825	761	3450-6800
22-58-SK	1300 + 1050	5800	280	56°	2455	130	2850	681	3650-6900
22-60-SK	1300 + 1050	6000	280	53°	2495	130	2875	708	3650-7100
22-62-SK	1300 + 1050	6200	280	50°	2495	130	2925	708	3850-7300
22-65-SK	1300 + 1050	6500	280	51°	2720	130	2975	789	4150-7600

H = Hookheight
 CH = Chassisheight
 MS = *Medida minima desde el suelo